



Leading the Way in.....
LED LIGHTING SOLUTIONS.



PRODUCT CATALOGUE





SPARKNXT®

Switch to quality, Switch to us.

COMPANY PROFILE

SPARKNXT



ABOUT US

Welcome to **SPARKNXT** Founded in 2025, with a steadfast commitment to excellence, we specialize in manufacturing and supplying indoor and outdoor LED lighting solutions, we are one stop solutions for complete lighting, SKD, Housing, Drivers, COB, LED, Reflectors Tracks and accessories.

Renowned as India's largest OEM LED lighting manufacturing we take pride in our ability to deliver innovative LED products of unparalleled quality at competitive prices. Our nationwide network insures swift and efficient sales and service support, earning us accolades from clients and market alike.

At **SPARKNXT**, we prioritize customer satisfaction and strive to provide credible quality of the sales service. Our products are lauded for their outstanding features, including superior lighting, energy efficiency, durability, minimal maintenance, low energy consumption, and high corrosion resistance.

With our product finding application in offices, households, industries and beyond, **SPARKNXT** stands as a leading, full spectrum provider of profession and architectural lighting solutions. leveraging over a century of expertise in LED lights and luminaries, we are your ultimate one-stop destination for differentiated product solutions

MISSION

At **SPARKNXT**, our mission is to illuminate the world sustainably by delivering innovative, energy-efficient LED lighting solutions that enhance lives, empower businesses, and protect the planet. We are committed to excellence in design, technology, and customer service—bringing brilliance to every space we touch.

VISION

At **SPARKNXT**, our vision is to illuminate the future by delivering innovative, energy-efficient LED lighting solutions that inspire brighter, smarter, and more sustainable environments. We strive to lead the transformation towards intelligent lighting that enhances lives, empowers communities, and safeguards our planet for generations to come.



+91 7205240599, +91 7205280599, +91 99029 65412
info@sparknxt.co.in
www.sparknxt.co.in
584/8672/9395, Nanda Complex, Badagada Canal Road, Bhubaneswar, Odisha



SPARKNXT[®]

Switch to quality, Switch to us.



INDOOR LIGHTING SOLUTION





SPARKNXT®

Switch to quality, Switch to us.

SLEEK SLIM



COLOUR : ●●●●●●●●

Green LED | Life 35000hrs | High Efficiency

Watt	Power Factor	Surge Protection	Lumen(lm)	IP-Rating	Size (mm)	Cut-Out Size (Inch)	Housing Type
3W	≥ 0.95	≥0.2KV	180	IP-20	85x85x21mm	3 Inch	Aluminium
6W			560		120mmx120x21mm	4 Inch	
12W		≥ 2.5KV	960		144x144x22mm	5 Inch	
15W			1200		169x169x22mm	6 Inch	
18W			1440		189x190x22mm	7 Inch	
22W			1760		222x222x22mm	8 Inch	

RUBICS



COLOUR : ●●●●●●●●

Green LED | Life 35000hrs | High Efficiency

Watt	Power Factor	Surge Protection	Lumen(lm)	IP-Rating	Size (mm)	Housing Type
8W	≥ 0.5	≥ 2.0KV	560	IP-20	120mmx120x35mm	Aluminium
15W			1200		172mmx172x35mm	
22W		1760	224mmx224x35mm			



SPARKNXT®

Switch to quality, Switch to us.


PLUTO



COLOUR :

Watt	Power Factor	Surge Protection	Lumen(lm)	IP-Rating	Size (mm)	Cut-Out Size (Inch)	Housing Type
8W	≥ 0.95	≥ 4.0KV	640	IP-20	116x116x35mm	4Inch	PC
12W			960		144x144x35mm	5Inch	
15W			1200		166x166x35mm	6Inch	
22W			1760		218x218x35mm	8Inch	

SLEEKPLUS LED 2X2

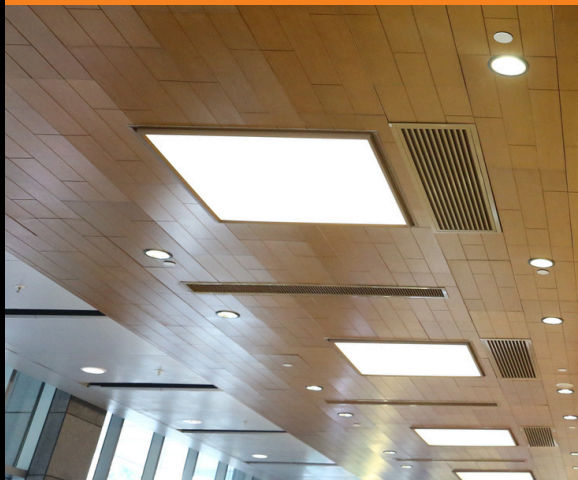

COLOUR :

Green LED | Life 35000hrs | High Efficiency

Watt	Power Factor	Surge Protection	Lumen(lm)	IP-Rating	Size (mm)	Cut-Out Size (Inch)	Housing Type
48W	≥ 0.95	≥ 4KV	3240	IP-20	600x600x32mm	585mm	MS-PC & AL frame



SPARKNXT®

Switch to quality, Switch to us.

TRICA



COLOUR :

Green LED | Life 35000hrs | High Efficiency

Watt	Power Factor	Surge Protection	Lumen(lm)	IP-Rating	Size (mm)	Cut-Out Size (Inch)	Housing Type
3+3W	≥0.5	≥2.5KV	210	IP-20	104X104	3 Inch	Aluminium
6+3W			420		145X145	4 Inch	
12+4W			840		195X195	6 Inch	





SPARKNXT®

Switch to quality, Switch to us.

ULTRA



COLOUR : ●●●●●●●●

Green LED | Life 35000hrs | High Efficiency

Watt	Power Factor	Surge Protection	Lumen(lm)	IP-Rating	Size (mm)	Housing Type
6W	≥ 0.95	≥ 4KV	600	IP-20	95x27mm	PC
12W			100		130x27mm	

CLASSY DOB



COLOUR : ●●●●●●●●

Green LED | Life 35000hrs | High Efficiency

Watt	Power Factor	Surge Protection	Lumen(lm)	Cut-Out Size (mm)	Size (mm)	IP-Rating	Housing Type
3W	≥ 0.90	≥ 1.5KV	180	28	40x24	IP-20	Aluminium



SPARKNXT®

Switch to quality, Switch to us.

SUPERNOVA



COLOUR :
3 IN 1 : PGC, CWN, PBV

Green LED | Life 35000hrs | High Efficiency

Watt	Power Factor	Lumen(lm)	Surge Protection	IP-Rating	Cut-Out Size (mm)	Size (mm)	Housing Type
3W	≥ 0.5	210	≥ 1.5KV	IP-20	55	80X32	PC

DRIVER (STREET LIGHT AND FLOOD LIGHT)



Watt	Power Factor	Size : LxWxH	Product Specification
20W -24W	≥0.95/4KV	63x28x20 mm	I/P AC 100-300V,50Hz,0/P DC 45-55V,300mA±5%
30W-36W		84x29x22 mm	I/P AC 100-300V,50Hz,0/P DC 28-40V,900mA±5%
50W		90x30x24 mm	I/P AC 100-300V,50Hz,0/P DC 28-40V,1.5A±5%
50W	≥ 0.95/6KV	90x30x24 mm	I/P AC 100-300V,50Hz,0/P DC 28-40V,1.5A±5%



SPARKNXT®

Switch to quality, Switch to us.

ULTRA MAX




COLOUR :

Green LED | Life: 35000hrs | High Efficiency

Watt	Power Factor	Lumen(lm)	Surge Protection	IP-Rating	Size (mm)	Cut-Out Size mm	Housing Type
8W	≥ 0.95	640	≥ 2.5KV	IP-20	88x88x42mm	45	PC
15W		1200			115x115x45mm	50	

FUZION

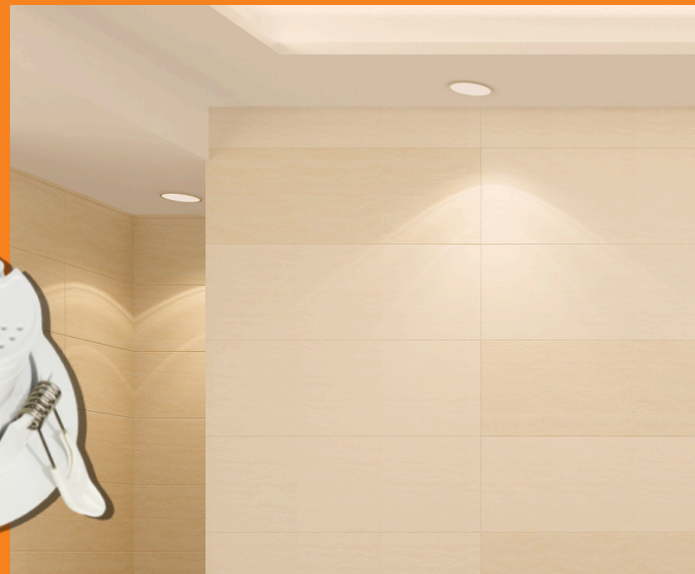

COLOUR :

Green LED | Life: 35000hrs | High Efficiency

Watt	Power Factor	Lumen(lm)	Surge Protection	IP-Rating	Size (mm)	Cut-Out Size (mm)	Housing Type
3W	≥ 0.50	210	≥ 1.5KV	IP-20	75X40mm	55	PC
7W	≥ 0.95	490	≥ 4KV		106X47mm	80	



SPARKNXT®

Switch to quality, Switch to us.

TONIC



COLOUR : ● ● ● ● ● ● ● ●

Green LED | Life 35000hrs | High Efficiency

Watt	Power Factor	Surge Protection	Lumen(lm)	IP-Rating	Size (mm)	Housing Type
6W	≥0.90	≥ 4 KV	480	IP-20	111x27	PC

FRONTLINE OVAL



COLOUR : ● ● ● ● ● ● ● ●

Watt	Power Factor	Lumen(lm)	Surge Protection	IP-Rating	Size (mm)	Housing Type
10W	≥0.5	1000	≥4KV	54	170x70x45	PC
20W		2000	≥2.5KV		210x97x55	



SPARKNXT®

Switch to quality, Switch to us.

OVAL BULK



COLOUR : ●●

Watt	Power Factor	Lumen(lm)	Surge Protection	IP-Rating	Size (mm)	Housing Type
20W	≥0.5	2000	≥3.5KV	IP-54	163x55mm	PC
30W	≥0.9	3000			216x66mm	

FRONTLINE BULK



COLOUR : ●●


Watt	Power Factor	Lumen(lm)	Surge Protection	IP-Rating	Size (mm)	Housing Type
20W	≥0.5	2000	≥3.5KV	IP-54	211x112x60	PC
30W	≥0.9	3000			266x141x74	



SPARKNXT®

Switch to quality, Switch to us.

ORION COB LIGHT

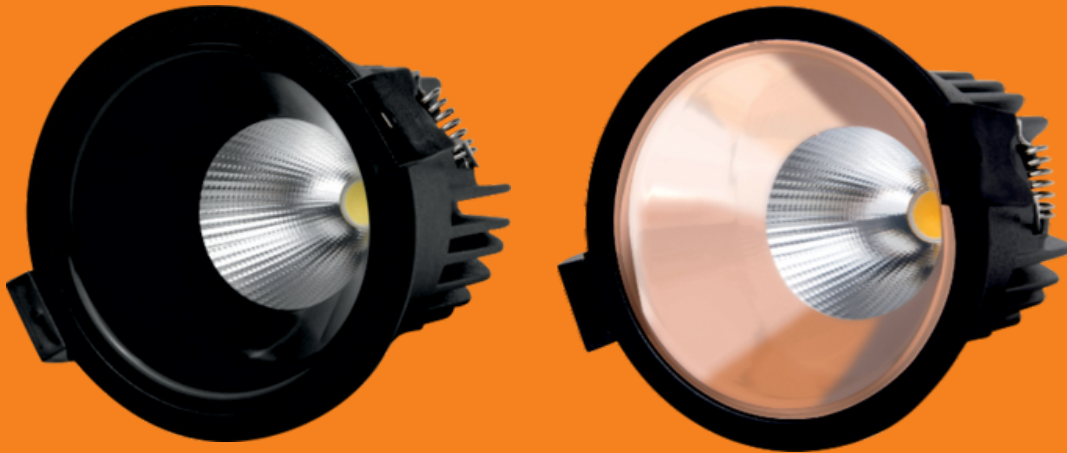

REFLECTOR MODEL

COLOUR : ●○○●

Watt	Power Factor	Lumen(lm)	Surge Protection	IP-Rating	Size (mm)	Cut-Out Size	Housing Type
7W	≥ 0.5	560	≥ 2.5KV	IP-20	65x58	55mm	Aluminium
12W	≥ 0.9	960	≥ 4KV		84x70	74mm	
18W		1440			104x90	95mm	

JUMBO PLUS



COLOUR : ●●○○

9W

20W

30W

40W

50W

Watt	Power Factor	Lumen(lm)	Surge Protection	IP-Rating	Size (mm)	Housing Type
9W	≥ 0.9 KV	900	≥ 4.0 KV	IP-20	110x60	PC with AC Insert
20W		2000			140x80	
30W		3000			182x113	
40W		4000			200x123	
50W		5000			217x134	



SPARKNXT®

Switch to quality, Switch to us.

ULTRA SLIMSMPS

HECTOR



HEXA



Z SERIES



LINEAR



Watt	Output Voltage	Input Voltage	Output Current	Power Factor	Surge Protection	Finish Product Size (LxWxH)	Housing Type	
24W	12V	100-300Vac	2A	≥ 0.5	>0.5KV	90x53x21mm	Aluminium	
36W			3A			108x53x21mm		
60W			5A			150x53x21mm		
120W			10A			225x53x21mm		
150W			12.5A		250x53x22mm	>2.5KV		250x53x22mm
200W			16.5A		250x53x22mm			
300W			25A		308x53x22mm			
400W			33.3A		308x53x22mm			

ULTRA SLIMSMPS

PANTHER



BUTTERFLY



HARMONY



DELTA



ARROW



**PUSH-FIT
TECHNOLOGY**

Watt	Output Voltage	Input Voltage	Output Current	Power Factor	Surge Protection	Finish Product Size (LxWxH)	Housing Type
24W	12V	100-300Vac	2A	≥ 0.5	>0.5KV	90x40x23mm	Aluminium
60W			5A			114x50x23mm	
120W			10A			138x50x23mm	
200W			16.5A		178x50x23mm	>2.5KV	
300W			25A		205x50x23mm		
400W			33.3A		240x50x23mm		



SPARKNXT[®]

Switch to quality, Switch to us.

TM

OUTDOOR LIGHTING SOLUTION





SPARKNXT®

Switch to quality, Switch to us.

FLOOD NEO



COLOUR : ●●●●●●●●

Green LED | Life 50000hrs | High Efficiency

Watt	Power Factor	Withstand Voltage	Surge Protection	IP-Rating	Lumen (lm)	Finish Product Size	Finish Product Weight	Housing Type
10W	≥ 0.95	440Vac	≥ 3.5-4 KV	IP-66	1000	126x118x38 mm	350 gram	Aluminium
20W					2000	182x184x42 mm	800 gram	
30W			≥ 6 KV		3000	182x184x42 mm	820 gram	
50W					5000	223x227x49 mm	1340 gram	
100W					10000	275x285x64 mm	2000 gram	
150W					15000	292x292x68 mm	2660 gram	
200W					20000	313x336x72mm	3770 gram	
300W					30000	318x420x93mm	5700 gram	
400W					40000	345x525x95mm	8056 gram	
500W					50000	355x630x95mm	9500 gram	

HEXA HIGHWAY LIGHT



COLOUR : ●●

Green LED | Life 50000hrs | High Efficiency

Watt	Power Factor	Withstand Voltage	Surge Protection	IP-Rating	Lumen (lm)	Finish Product Size	Finish Product Weight	Housing Type
100W	≥ 0.95	440Vac	≥ 6 KV	IP-66	10000	263x48mm	750 grams	Aluminium
150W					15000	305x48mm	1020 grams	
200W					20000	335x48mm	1370 grams	
300W					30000	395x155	3540 gram	



SPARKNXT®

Switch to quality, Switch to us.

CRYSTAL LED WALL LIGHT



2 WAY



4WAY

COLOUR :

Watt	Power Factor	Lumen(lm)	Surge Protection	IP-Rating	Size (mm)	Housing Type
4W	≥ 0.5	140	≥ 2.5 KV	IP-66	59x59x44mm	Aluminium
8W		280				

CRYSTAL LED WALL LIGHT



2 EYE



4 EYE

COLOUR :

Watt	Power Factor	Lumen(lm)	Surge Protection	IP-Rating	Size (mm)	Housing Type
4W	≥ 0.5	140	≥ 2.5 KV	IP-66	80x74x35mm	Aluminium
8W		280			100x80x38mm	



SPARKNXT®

Switch to quality, Switch to us.

SKYLINE



COLOUR : ●●●

Green LED | Life 35000hrs | High Efficiency

Watt	Power Factor	Withstand Voltage	Surge Protection	Pole Dia	IP-Rating	Lumen (lm)	Finish Product Size (LxWxH)	Finish Product Weight	Housing Type
20W	≥ 0.95	440Vac	≥ 4 KV	40 mm	IP-66	2000	260x90x56mm	440 grams	Aluminium
24W						2400	260x90x56mm	460 grams	
30W						3000	295x110x56mm	500 grams	
36W						3600	295x110x56mm	543 grams	
50W				5000		345x128x65mm	725 grams		
72W				7200		345x128x65mm	750 grams		
100W				10000		402x154x68mm	1010 grams		
								56 mm	

SKYLINE PLUS



COLOUR : ●●

Green LED | Life 35000hrs | High Efficiency

Watt	Power Factor	Withstand Voltage	Surge Protection	IP-Rating	Lumen (lm)	Pole Dia	Size (mm)	Finish Product Weight	Housing Type
150W	≥ 0.95	440Vac	≥ 6.0KV	IP-66	15000	60mm	543x225x70.5mm	1840 grams	
200W					20000		596x235x70.5mm	2000 grams	



SPARKNXT®

Switch to quality, Switch to us.

SPECTRA DOB STREET LIGHT



COLOUR : ○ ○ ○

Green LED | Life 35000hrs | High Efficiency

Watt	Power Factor	Withstand Voltage	Surge Protection	Pole Dia	IP-Rating	Lumen (lm)	Finish Product Size (LxWxH)	Finish Product Weight	Housing Type
20W	≥ 0.95	440Vac	≥ 4 KV	40 mm	IP-66	2000	260x90x56mm	365 grams	Aluminium
24W						2400	260x90x56mm	370 grams	
30W						3000	295x110x56mm	450 grams	
36W				3600		295x110x56mm	465 grams		
50W				5000		345x128x65mm	600 grams		
72W				7200		345x128x65mm	610 grams		
100W				10000		402x154x68mm	820 grams		





SPARKNXT®

Switch to quality, Switch to us.

UNICO SOLARLED STREET LIGHT



COLOUR : ●

Green LED | Life 35000hrs | High Efficiency

Watt	Real Power	Lumens	Battery	Window	IP Rating	Housing Type	Backup	Finish Product Size (LxWxH)	Weight	Pole Dia
60W	10W	1050	10AH	4	IP-65	ABS	8Hrs. to 10Hrs.	522x230x55mm	1600 grams	50mm
100W	15W	1400	15AH	6				630x246x55mm	2100 grams	
200W	25W	2500	20AH	8				730x252x56mm	2400 grams	

UNICO PLUS SOLARLED STREET LIGHT



COLOUR : ●

Green LED | Life 35000hrs | High Efficiency

Watt	Real Power	Lumens	Battery	Window	IP Rating	Housing Type	Backup	Finish Product Size (LxWxH)	Weight	Pole Dia
60W	8W	1300	10AH	8	IP-65	ABS	8Hrs. to 10Hrs.	260x65x500mm	1700 grams	50mm
100W	11.2W	1750	15AH	10				260x60x580mm	2000 grams	
200W	14.4W	2150	20AH	12				260x60x660mm	2300 grams	



SPARKNXT®

Switch to quality, Switch to us.

APOLLO




COLOUR : ●●

Green LED | Life 50000hrs | High Efficiency

Watt	Power Factor	Withstand Voltage	Surge Protection	IP-Rating	Lumen (lm)	Finish Product Size	Finish Product Weight	Housing Type
30W	≥ 0.95	440Vac	≥ 4 KV	IP-66	3000	178x120x37	460	Aluminium
50W					5000	202x140x37	560	
100W			10000		305x220x37	1250		
200W			20000		380x280x37	2080		

APOLLO NEO

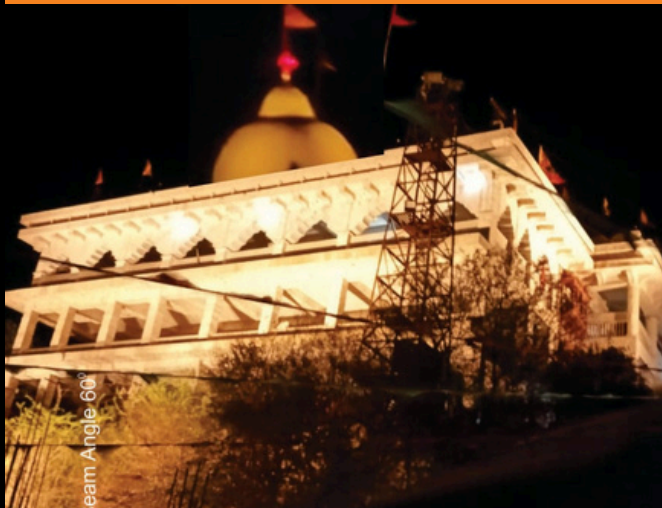

COLOUR : ●●

Green LED | Life 35000hrs | High Efficiency

Watt	Power Factor	Withstand Voltage	Surge Protection	IP-Rating	Lumen (lm)	Finish Product Size	Finish Product Weight	Housing Type
30W	≥ 0.95	440Vac	≥ 4kv	IP-66	3000	149x124x26	300	Aluminium
50W					5000	206x161x26	470	
100W					10000	271x211x26	765	
200W					20000	285x320x26	1641	



Switch to quality, Switch to us.

ALPINE INGROUND UPLIGHTER STAINLESS STEEL

Watt
CCT
Lumens
Input Voltage
Angle
LED
Honeycomb
Life Span
CRI
PF
Ingress Protection
IK
Body Material
Pre-Mount Casing
Glass Material
Accessories
Power Cable
Dimmable Support


- 1W / 2W / 4W / 6W / 9W / 12W/ 15W / 18W
- 2700K / 3K / 4K / 6K / RGB / RGBW
- 72 / 150 / 320 / 480 / 720 / 960 / 1200 / 1440 Lm
- 220VAC/ 12VDC-24VDC option available
- 4°/8°/15°/24°/36°/60°
- SMD
- Optional
- 50000 Hours
- >85
- >0.9
- IP 67
- 08
- Whole fixture made of SS-304 grade steel
- ABS material
- Clear toughened glass of 5mm thickness
- IP 67/IP 68 Connectors on request
- High Temperature Silicon 3Cx1.5mm² of 500mm
- Triac-PWM-1-10V Dali



ALPINE CD INGROUND UPLIGHTER ALUMINIUM SS

Watt
CCT
Lumens
Input Voltage
Angle
LED
Life Span
CRI
PF
Ingress Protection
IK
Body Material
Pre-Mount Casing
Glass Material
Accessories
Power Cable
Dimmable Supportort

- 3W/ 9W / 12W/ 18W / 24W / 36W
- 2700K / 3K/ 4K/ 6K/ RGB / RGBW
- 220/ 860 /1050 /1450 /1900 / 2800 Lm
- 220VAC / 12VDC-24VDC option available
- 4°/ 8° / 15° /24° /36° / 60°
- SMD
- Optional
- 50000 Hours
- >85
- >0.9
- IP 67
- 08
- Made of Die-cast Alumunium with SS Ring
- ABS material
- Clear toughened glass of 5mm thickness
- IP 67/IP 68 Connectors on request
- High Temperature Silicon 3Cx1.5mm² of 500mm
- Triac-PWM-1-10V Dali

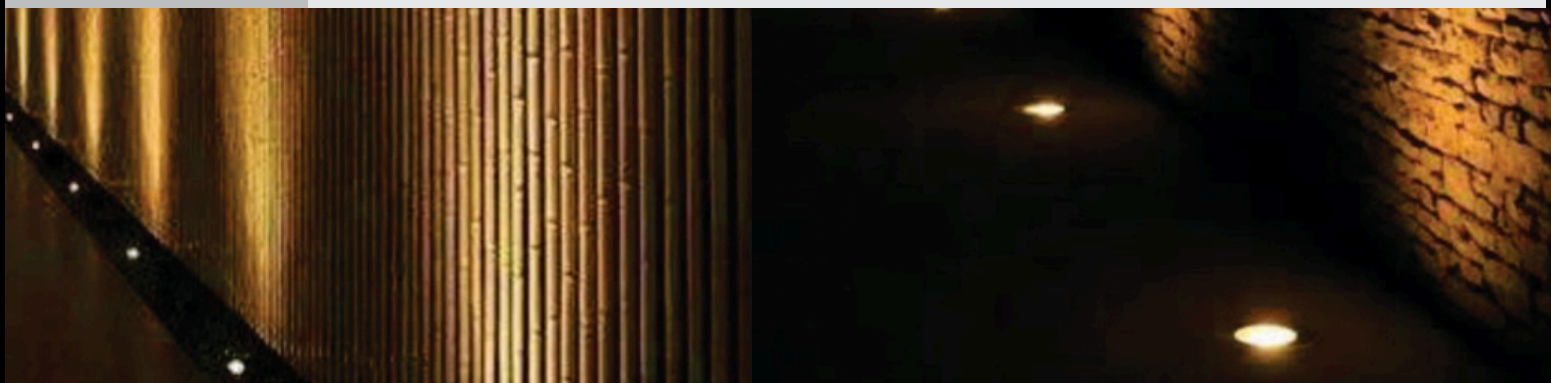




SPARKNXT®

Switch to quality, Switch to us.


ORBIT INGROUND BURIAL DIRECTIONAL

Watt	• 3W/ 6W/ 9W
CCT	• 2700K/ 3K/ 4K/ 6K
Lumens	• 220/350/540 Lm
Input Voltage	• 220VAC/12VDC-24VDC option available
Angle	• 45°/60°/90° Asymmetrical
LED	• SMD
Life Span	• 50000 Hours
CRI	• >85
PF	• >0.9
Ingress Protection	• IP 67
IK	• 08
Body Material	• Made of SS-304 grade steel
Pre-Mount Casing	• ABS material
Glass Material	• Clear toughened glass of 5mm thickness
Accessories	• IP 67/IP 68 Connectors
Power Cable	• High Temperature Silicon 3Cx1.5mm ² of 500mm
Dimmable Support	• Triac-PWM-1-10V Dali

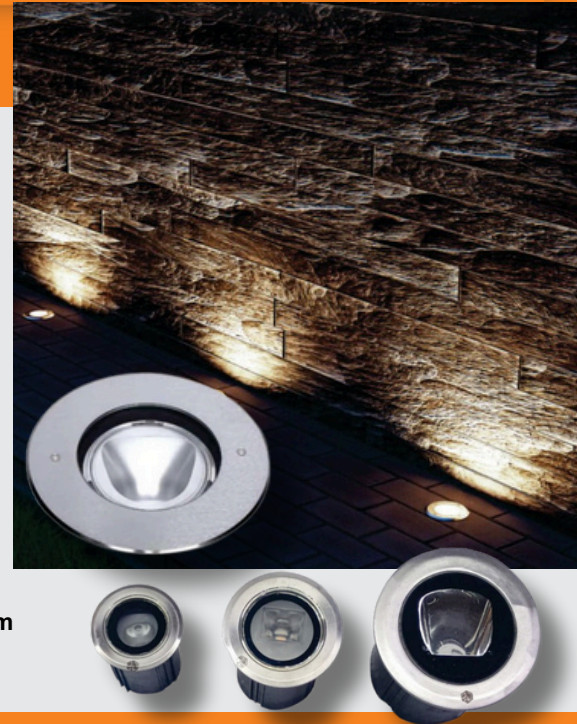

DELTA INGROUND UPLIGHTER ALUMINIUM SS

Watt	• 3W / 6W / 9W / 18W
CCT	• 2700K/3K/4K/6K/RGB/RGBW
Lumens	• 220/480/720/1400 Lm
Input Voltage	• 220VAC/12VDC-24VDC option available
Angle	• 4°/15°/24°/36°
LED	• Optional
Life Span	• SMD
CRI	• 50000 Hours
PF	• >85
Ingress Protection	• >0.9
IK	• IP 67
Body Material	• 08
Pre-Mount Casing	• Body made of Die-cast Aluminium with
Glass Material	• SS-304 Ring
Accessories	• ABS material
Power Cable	• Clear toughened glass of 5mm thickness
Dimmable Support	• IP 67/IP 68 Connectors
	• High Temperature Silicon 3Cx1.5mm ² of 500mm
	• Triac-PWM-1-10V Dali

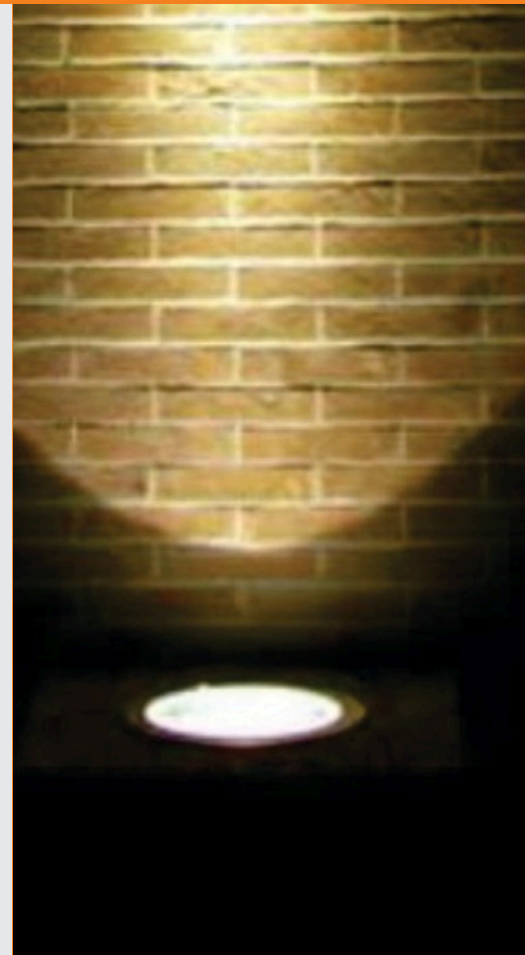



Switch to quality, Switch to us.


RIVIERA

INGROUND BURIAL SIDE EMITTING

Watt
CCT
Lumens
Input Voltage
Angle
LED
Life Span
CRI
PF
Ingress Protection
IK
Body Material

Pre-Mount Casing
Glass Material
Accessories
Power Cable
Dimmable Support

- 2W / 6W
- 2700 K/ 3K/ 4K/ 6K
- 80/240 Lm
- 220VAC/12VDC-24VDC option available
- 1 Side/2 Side/3 Side/4 Side
- SMD/COB
- 50000 Hours
- >85
- >0.9
- IP 67
- 10
- Aluminium Body Powder Coated
- Whole Body Made from SS 304 Grade Steel
- ABS material
- Clear toughened glass of 5mm thickness
- IP 67/IP 68 Connectors on request
- High Temperature Silicon 3Cx1.5mm² of 500mm
- Triac-PWM-1-10V Dail


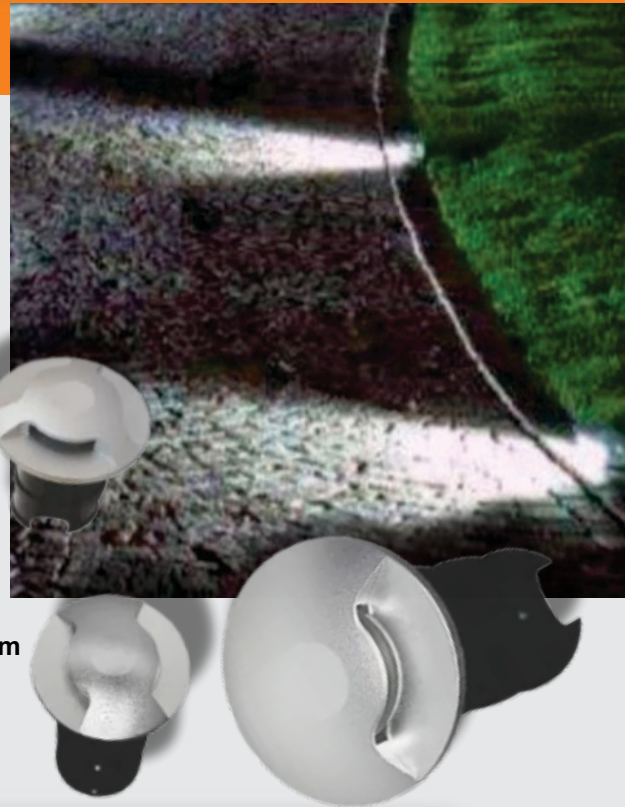


HORIZON

SURFACE MOUNT POOL LIGHT STAINLESS STEEL

Watt
CCT
Lumens
Input Voltage
Angle
LED
Life Span
CRI
PF
Ingress Protection
IK
Body Material
Glass Material
Accessories
Power Cable
Dimmable Support

- 3W / 6W / 9W / 12W / 18W
- 2700K / 3K / 4K / 6K / RGB / RGBW
- 180 / 360 / 540 / 720 / 1080 Lm
- 12VDC-24VDC
- 15° / 24° / 36° / 60° / Asymmetrical
- SMD
- 50000 Hours
- >85
- >0.9
- IP 68
- 08
- Made from SS 304 Grade Steel
- Clear toughened glass of 5mm thickness
- IP 68 Connectors
- High Temperature Silicon 3C x 1.5mm² of 1mtr
- Triac-PWM-1-10V Dali

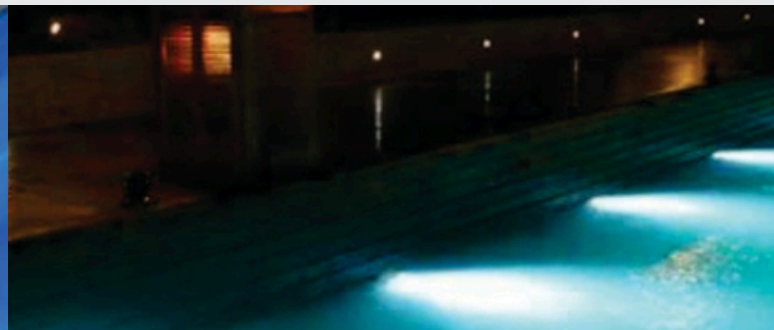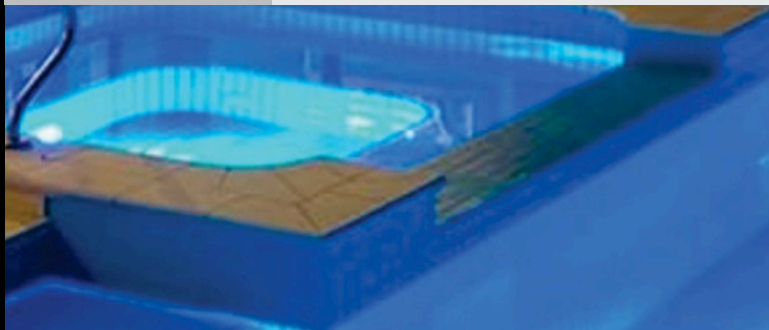



SPARKNXT®

Switch to quality, Switch to us.

OMEGA

SURFACE MOUNT POOL LIGHT STAINLESS STEEL

Watt
CCT
Lumens
Input Voltage
Angle
LED
Life Span
CRI
PF
Ingress Protection
IK
Body Material
Glass Material
Accessories
Power Cable
Dimmable Support

- 12W / 18W / 22W
- 3K / 6K / Blue
- 580 / 880 / 1080 Lm
- 12VDC
- Diffused
- SMD
- 50000 Hours
- >85
- >0.9
- IP 68
- 08
- Made of ABS
- Poly Carbonate Diffused
- IP 68 Connectors on request
- High Temperature Silicon 3C x 1.5mm² of 1mtr
- Triac-PWM-1-10V Dali




KAPSULE

RECESSED POOL LIGHT STAINLESS STEEL

Watt
CCT
Lumens
Input Voltage
Angle
LED
Life Span
CRI
PF
Ingress Protection
IK
Body Material
Pre-Mount Casing
Glass Material
Accessories
Power Cable
Dimmable Support

- 1W / 3W / 6W / 9W / 12W / 18W / 24W
- 2700K / 3K / 4K / 6K / RGB / RGBW
- 60 / 180 / 350 / 540 / 720 / 1080 / 1440 Lm
- 12VDC-24VDC
- 15° / 24° / 36° / 60° / Asymmetrical
- SMD
- 50000 Hours
- >85
- >0.9
- IP 68
- 08
- Made of SS 304 Grade Steel
- ABS material
- Clear toughened glass of 5mm thickness
- IP 68 Connectors on request
- High Temperature Silicon 3C x 1.5mm² of 1mtr
- Triac-PWM-1-10V Dali

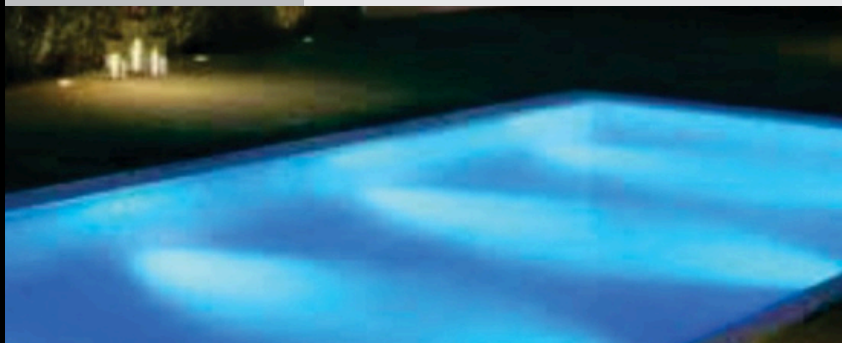




SPARKNXT®

Switch to quality, Switch to us.



VENTO SURFACE MOUNT POOL LIGHT ABS BODY

Watt	1W / 3W / 6W / 9W / 12W / 18W
CCT	2700K / 3K / 4K / 6K / RGB / RGBW
Lumens	60 / 180 / 350 / 540 / 720 / 1080 Lm
Input Voltage	12VDC-24VDC
Beam Angle	15° / 24° / 36° / 60° / Asymmetrical / Diffused
LED	SMD
Life Span	50000 Hours
CRI	>85
PF	>0.9
Ingress Protection	IP 68
IK	08
Body Material	Made of SS 304 Grade Steel
Glass Material	Clear toughened glass of 5mm thickness
Accessories	IP 68 Connectors on request
Power Cable	High Temperature Silicon 3C x 1.5mm ² of 500mm
Dimmable Support	Triac-PWM-1-10V Dali

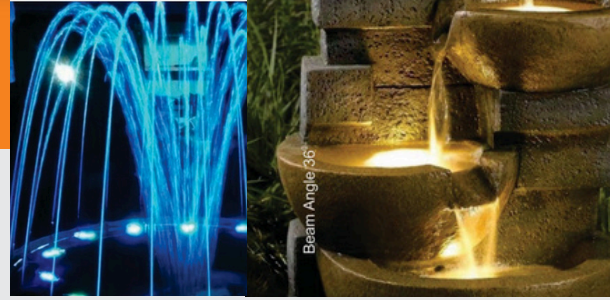

VROOM FOUNTAIN NOZZLE LIGHT (DONUT) SS

Watt	• 6W / 12W / 18W
CCT	• 2700K / 3K / 4K / 6K / RGB / RGBW
Lumens	• 350/580/960 Lm
Input Voltage	• 12VDC-24VDC
Angle	• 15°/24°/36°/60°
LED	• SMD
Life Span	• 40mm/65mm
CRI	• 50000 Hours
PF	• >85
Ingress Protection	• >0.9
IK	• IP 68
Body Material	• 08
Glass Material	• Made of SS 304 Grade Steel
Accessories	• Clear toughened glass of 5mm thickness
Power Cable	• IP 68 Connector
Dimmable Support	• High Temperature Silicon 3Cx1.5mm ² of 500mm
	• Triac-PWM-1-10V Dali

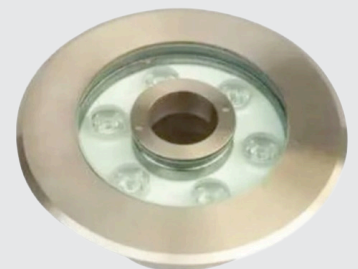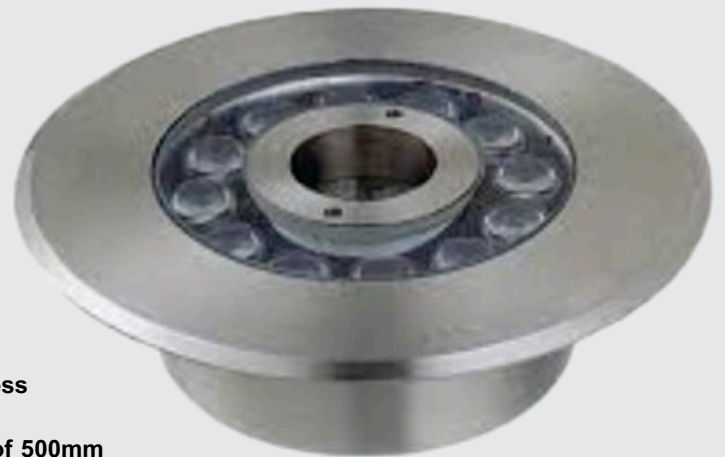



SPARKNXT®

Switch to quality, Switch to us.

JUPITER SURFACE MOUNT POOL LIGHT ABS BODY

Watt	• 10W/15W/24W
CCT	• 2700K/3K/4K/6K
Lumens	• 400/600/1600 Lm
Input Voltage	• 12VDC-24VDC
Angle	• Diffused/15° x 30/15/24/36/60/15 x30/15x55"
LED	• SMD
Life Span	• 50000 Hours
CRI	• >85
PF	• >0.9
Ingress Protection	• IP 68
IK	• 08
Body Material	• Made of Aluminium Powder Coated • Body Made of Clear Poly Carbonate & SS
Glass Material	• Clear toughened glass of 8mm thickness
Accessories	• IP 68 Connectors on request
Power Cable	• High Temperature Silicon 3Cx1.5mm ² of 1mtr
Dimmable Support	• Triac-PWM-1-10V Dali



Surface Round Linear Under Water



Recessed Linear Under Water



Surface Linear Diffused Under Water

FUTURA SURFACE MOUNT WALL GRAZER WITH VISOR

Watt	• 8W / 12W / 18W / 24W / 36W / 48W
CCT	• 2700K/ 3K / 4K /6K / RGB /RGBW
Lumens	• 680 / 1020 / 1530 / 2040 /3060 / 4080 Lm
Input Voltage	• 220VAC-12VDC-24VDC
Angle	• 6/15/24/36/60/15 x30°/15° x 55
LED	• SMD
Honeycomb	• Optional
Fixture Colour	• Black/Graphite gray/Off-white/Silver
Life Span	• 50000 Hours
CRI	• >85
PF	• >0.9
Ingress Protection	• IP 66
IK	• 07
Body Material	• Made of Extruded Aluminum with Powder Coated
Glass Material	• Clear toughened glass of 4mm thickness
Accessories	• IP 67 Connectors • Honeycomb Louvre Option Available
Power Cable	• High Temperature Silicon 3Cx1.5mm ² of 500mm
Dimmable Support	• Triac-PWM-1-10V Dali





SPARKNXT®

Switch to quality, Switch to us.

FUTURA MAXI SURFACE MOUNT WALL GRAZER SLEEK

Watt
CCT
Lumens
Input Voltage
Angle
LED
Life Span
CRI
PF
Ingress Protection
IK
Body Material
Glass Material
Accessories
Power Cable
Dimmable Support


- 8W / 12W / 18W / 24W / 36W / 48W
- 2700K / 3K / 4K / 6K / RGB / RGBW
- 680 / 1020 / 1530 / 2040 / 3060 / 4080 Lm
- 220VAC–12VDC–24VDC
- 6° / 15° / 24° / 36° / 60° / 15°×30° / 15°×55°
- SMD
- Optional
- Black / Graphite gray / Off-white / Silver
- 50000 Hours
- >85
- >0.9
- IP 66
- 07
- Made of Extruded Aluminium with Powder Coated
- Clear toughened glass of 4mm thickness
- IP 67 Connectors / Honeycomb Louvre Option
- High Temperature Silicon 3C x 1.5mm² of 500mm
- Triac-PWM-1-10V Dali



FUTURA MIDI SURFACE MOUNT WALL GRAZER

Watt
CCT
Lumens
Input Voltage
Angle
LED
Honeycomb
Fixture Colour
Life Span
CRI
PF
Ingress Protection
IK
Body Material
Glass Material
Accessories
Power Cable
Dimmable Support

- 8W / 12W / 18W / 24W / 36W / 48W / 60W
- 2700K / 3K / 4K / 6K / RGB / RGBW
- 720 / 960 / 1440 / 1920 / 2850 / 3840 / 4800 Lm
- 220VAC–12VDC–24VDC
- 6° / 15° / 24° / 36° / 60° / 15°×30° / 15°×55°
- SMD
- Optional
- Black / Graphite gray / Off-white / Silver
- 50000 Hours
- >85
- >0.9
- IP 66
- 07
- Made of Extruded Aluminium with Powder Coated
- Clear toughened glass of 4mm thickness
- IP 67 Connectors
- Honeycomb Louvre Option Available
- High Temperature Silicon 3C x 1.5mm² of 500mm
- Triac-PWM-1-10V Dali

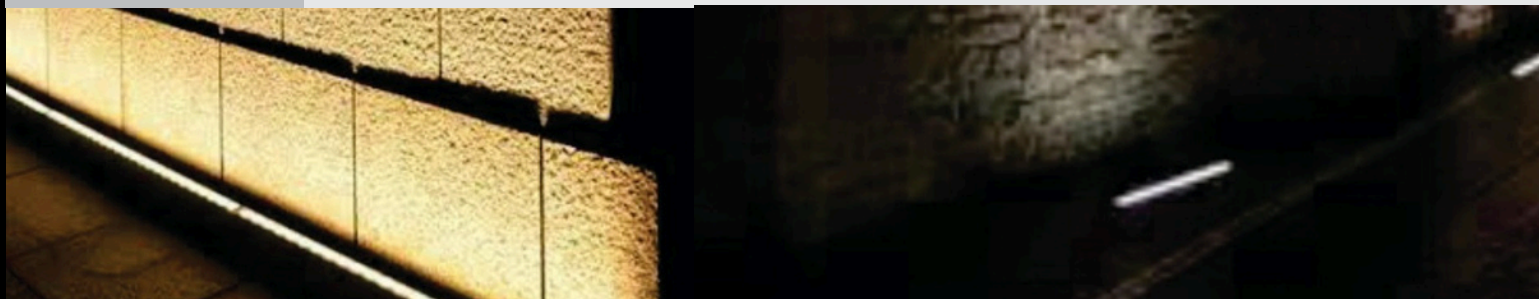




SPARKNXT®

Switch to quality, Switch to us.



FUTURA MINI FLOOR RECESSED WALL GRAZER

- | | |
|---|---|
| <p>Watt</p> <p>CCT</p> <p>Lumens</p> <p>Input Voltage</p> <p>Angle</p> <p>LED</p> <p>Honeycomb</p> <p>Fixture Colour</p> <p>Life Span</p> <p>CRI</p> <p>PF</p> <p>Ingress Protection</p> <p>IK</p> <p>Body Material</p>
<p>Glass Material</p> <p>Accessories</p>
<p>Power Cable</p> <p>Dimmable Support</p> | <ul style="list-style-type: none"> • 8W / 12W / 18W / 24W / 36W / 48W / 60W • 2700K / 3K / 4K / 6K / RGB / RGBW • 720/960/1440/1920/2850/3840/4800 Lm • 220Vac-12Vdc-24Vdc • 6/15/24/36/60/15 x 30/15° x 55/Diffused • SMD • Optional • Black/Graphite gray/Off-white/Silver • 50000 Hours • >85 • >0.9 • IP 67 • 09 • Made of Extruded Aluminium with Powder Coated • Housing Made of GI Powder Coated • Clear toughened glass of 8mm thickness • IP 67 Connectors • Honeycomb Louvre Option Available • High Temperature Silicon 3Cx1.5mm² of 500mm • Triac-PWM-1-10V Dali |
|---|---|

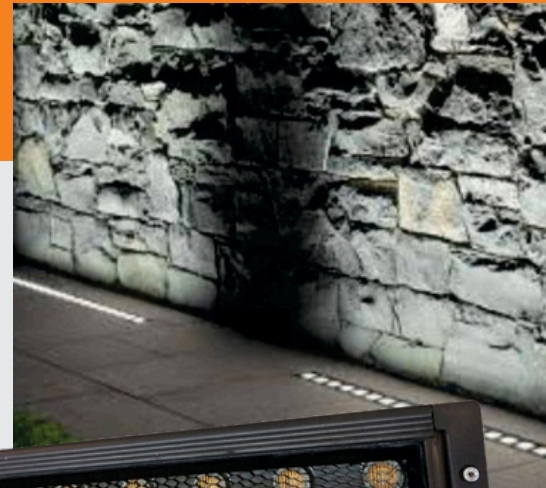

WALL MOUNT UP LIGHT

- | | |
|---|--|
| <p>Watt</p> <p>CCT</p> <p>Lumens</p> <p>Input Voltage</p> <p>Angle</p> <p>LED</p> <p>Life Span</p> <p>CRI</p> <p>PF</p> <p>Ingress Protection</p> <p>IK</p> <p>Body Material</p> <p>Glass Material</p> <p>Accessories</p>
<p>Power Cable</p> <p>Dimmable Support</p> | <ul style="list-style-type: none"> • 3W / 6W / 12W / 18W / 40W • 2700K / 3K / 4K / 6K / RGB • 240 / 480 / 960 / 1440 / 3200 Lm • 220VAC • 15° / 24° / 36° / 60° • SMD • 50000 Hours • >85 • >0.9 • IP 65 • 07 • Made of Die-cast Aluminium with powder coated • Clear toughened glass of 5mm thickness • IP 67 Connectors • Honeycomb Louvre & Snoot Option Available • High Temperature Silicon 3C x 1.5mm² of 500mm • Triac-PWM-1-10V Dali |
|---|--|

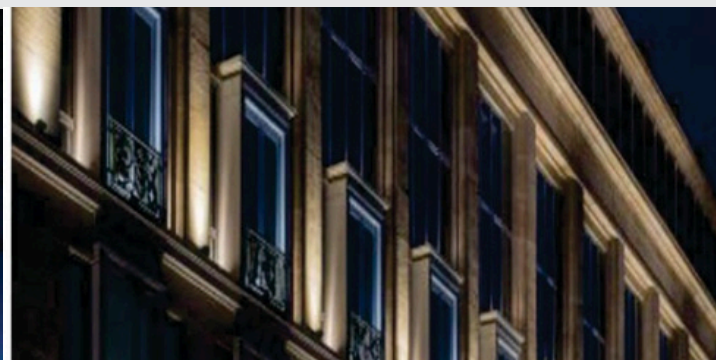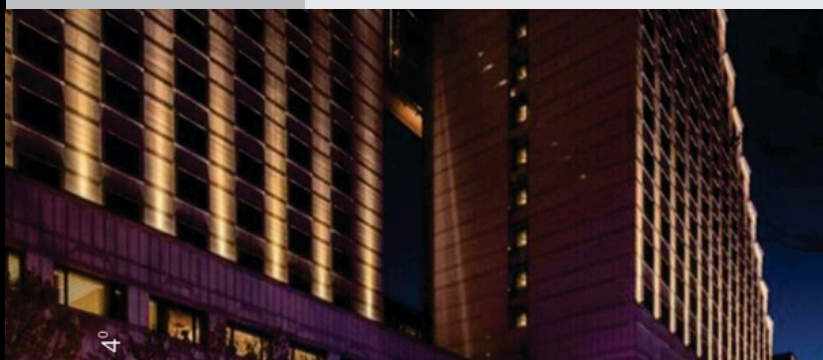



SPARKNXT®

Switch to quality, Switch to us.


WALL MOUNT UP/DOWN LIGHT

Watt	• 6W / 12W / 18W / 36W / 50W
CCT	• 2700K / 3K / 4K / 6K / RGB
Lumens	• 480 / 960 / 1440 / 2880 / 4100 Lm
Input Voltage	• 220VAC
Angle	• 10° / 15° / 24° / 36° / 60°
LED	• SMD / COB
Life Span	• 50000 Hours
CRI	• >85
PF	• >0.9
Ingress Protection	• IP 65
IK	• 07
Body Material	• Made of Die-cast Aluminium with powder coated
Glass Material	• Clear toughened glass of 4mm thickness
Accessories	• IP 67 Connectors
Power Cable	• High Temperature Silicon 3C x 1.5mm ² of 1mtr
Option	• Honeycomb Louvre & Snoot Available
Dimmable Support	• Triac- PWM-1-10V Dali



SURFACE MOUNT CEILING LIGHT

Watt	• 3W / 6W / 12W / 20W
CCT	• 2700K / 3K / 4K / 6K
Lumens	• 270 / 480 / 960 / 1600 Lm
Input Voltage	• 220VAC / 12VDC / 24VDC
Angle	• 10° / 15° / 24° / 36° / 60°
LED	• SMD / COB
Life Span	• 50000 Hours
CRI	• >85
PF	• >0.9
Ingress Protection	• IP 65
IK	• 07
Body Material	• Made of Aluminium Powder Coated
Glass Material	• Clear toughened glass of 5mm thickness
Accessories	• IP 67 Connectors on request
Power Cable	• High Temperature Silicon 3C x 1.5mm ² of 500mm
Dimmable Support	• Triac-PWM-1-10V Dali

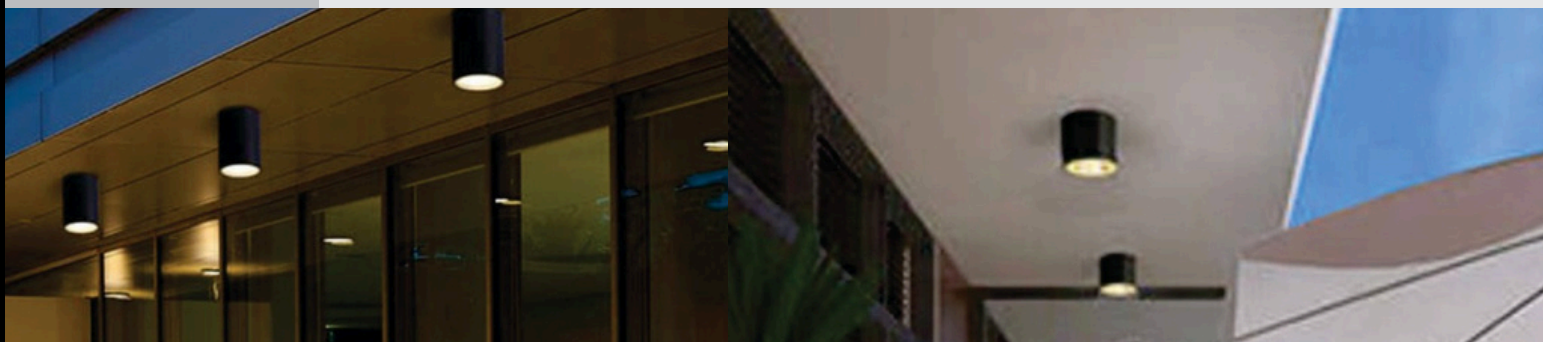



SPARKNXT®

Switch to quality, Switch to us.

LED SPIKE AL BODYTV

Watt
 CCT
 Lumens
 Input Voltage
 Angle
 LED
 Life Span
 CRI
 PF
 Ingress Protection
 IK
 Body Material
 Glass Material
 Accessories
 Power Cable
 Option
 Dimmable Support


- 6W / 9W / 12W
- 2700K / 3K / 4K / 6K / RGB
- 480 / 720 / 960 Lm
- 220Vac / 24Vdc
- 15° / 24° / 36° / 60°
- SMD
- 50000 Hours
- >85
- >0.9
- IP 65
- 07
- Made of Die-cast Aluminium with powder coated
- Clear toughened glass of 4mm thickness
- IP 67 Connectors
- High Temperature Silicon 3C x 1.5mm² of 500mm
- Honeycomb Louvre & Snoot Available
- Triac-PWM-1-10V Dali



LED SPIKE SS BODY

Watt
 CCT
 Lumens
 Input Voltage
 Angle
 LED
 Life Span
 CRI
 PF
 Ingress Protection
 IK
 Body Material
 Glass Material
 Accessories
 Power Cable
 Option
 Dimmable Support

- 3W / 6W / 9W
- 2700K / 3K / 4K / 6K / RGB
- 240 / 480 / 630 Lm
- 220VAC / 12VDC / 24VDC
- 15° / 24° / 36° / 60°
- SMD
- 50000 Hours
- >85
- >0.9
- IP 65
- 08
- Made of Stainless Steel
- Clear toughened glass of 5mm thickness
- IP 67 Connectors
- High Temperature Silicon 3C x 1.5mm² of 500mm
- Honeycomb Louvre
- Triac-PWM-1-10V Dali

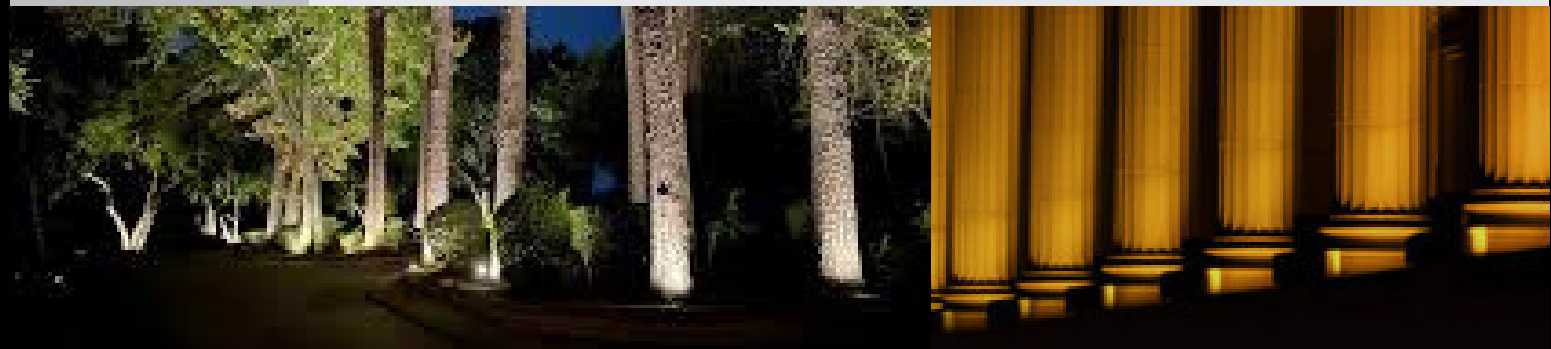



SPARKNXT®

Switch to quality, Switch to us.


WALL/SPIKE MOUNTED SS SPOT

- | | |
|--------------------|---|
| Watt | • 3W |
| CCT | • 2700K/3K/4K/6K |
| Lumens | • 240 Lm |
| Input Voltage | • 220VAC/12VDC/24VDC |
| Angle | • 8°/15°/24°/36°/60° |
| LED | • SMD |
| Life Span | • 50000 Hours |
| CRI | • >85 |
| PF | • >0.9 |
| Ingress Protection | • IP 66 |
| IK | • 08 |
| Body Material | • Made of Stainless Steel |
| Glass Material | • Clear Toughened Glass of 5mm thickness |
| Accessories | • IP 67 Connectors |
| Power Cable | • High Temperature Silicon 3Cx1.5mm ² of 500mm |
| Option | • Honeycomb Louvre |
| Dimmable Support | • Triac-PWM-1-10V Dali |



FLOOR MOUNT FOCUS LIGHT

- | | |
|--------------------|---|
| Watt | • 16W / 25W / 40W |
| CCT | • 2700K/3K/4K/6K/RGB |
| Lumens | • 1280/2000/3200 Lm |
| Input Voltage | • 220Vac |
| Angle | • 15°/24°/36°/60° |
| LED | • SMD |
| Life Span | • 50000 Hours |
| CRI | • >85 |
| PF | • >0.9 |
| Ingress Protection | • IP 65 |
| IK | • 07 |
| Body Material | • Made of Die cast Aluminium with powder coated |
| Glass Material | • Clear toughened glass of 4mm thickness |
| Accessories | • IP 67 Connectors |
| Power Cable | • High Temperature Silicon 3Cx1.5mm ² of 500mm |
| Option | • Honeycomb Louvre & Snoot Available |
| Dimmable Support | • Triac-PWM-1-10V Dali |

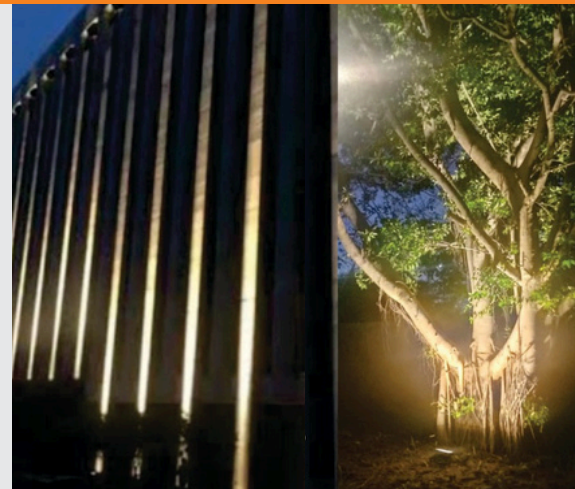



SPARKNXT®

Switch to quality, Switch to us.

WALL/SPIKE MOUNTED SS SPOT



Watt	• 6W / 12W
CCT	• 3K / 4K
Lumens	• 460/860 Lm
Input Voltage	• 220-240 VAC
Angle	• 4°
LED	• SMD
Life Span	• 50000 Hours
CRI	• >85
PF	• >0.9
Housing Material	• Aluminium Powder Coated
Body Finish	• Grey





SPARKNXT®

Switch to quality, Switch to us.



CONTACT US



+91 7205240599, +91 7205280599,
+91 99029 65412



info@sparknxt.co.in



www.sparknxt.co.in



584/8672/9395, Nanda
Complex, Badagada Canal Road,
Bhubaneswar, Odisha

